

# CS-508 Modern Programming Update MCQS For Quiz-3 File Solve By Vu Topper RM

**85% To 100% Marks**



Virtual University

وَتَعَزُّ مِنْ تَشَاءٍ وَتُدِلُّ مِنْ تَشَاءٍ

## PROFESSIONAL ONLINE ACADEMY




### We Offers

- LMS Handling
- Important Notes
- Online Classes
- Assignments
- Quiz & GDB's
- Projects

### NOTHING Is IMPOSSIBLE

**Join Us  
Now**

For More Info  
Contact us at:  
**Rizwan Manzoor**  
☎ **0322-4021365**

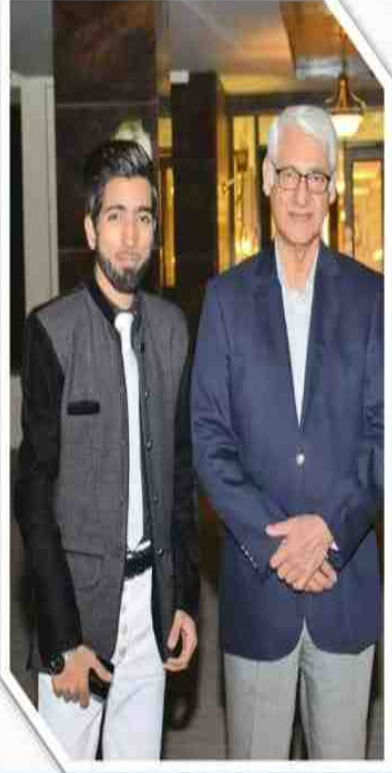

بري صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

A type conversion that occurs without any special directive from the programmer is known as:

- A. Strict conversion
- B. Explicit conversion
- C. Implicit conversion**
- D. Imperative conversion

Page 98

Which of the following are the types of constants in PROLOG?

- A. short and char
- B. float and numbers
- C. single and decimal
- D. atoms and numbers**

Google

The super class of all exception classes in Java is:

- A. Throwable**
- B. Error
- C. System
- D. Exception

Google

In java, explicit conversion of primitive type is done by \_\_\_\_\_

- A. boxing
- B. casting**
- C. overloading
- D. aliasing

When a class inherits from another class in Java then:

- A. all fields and methods are inherited**
- B. only public fields and methods are inherited
- C. only private fields and methods are inherited
- D. only static fields and methods are inherited

A variable name in PROLOG starts with \_\_\_\_\_

- A. Number

بري صحبت سے تنہائی بہتر ہے اور تنہائی سے نيک صحبت بہتر ہے

For More Help Contact What's app 03224021365

- B. Capital letter
- C. Small letter**
- D. \$ sign

A main() function in a JAVA program:

- A. must be inside a class**
- B. returns more than one value
- C. is always declared as a global function
- D. cannot be inside a class

\_\_\_\_\_ cannot be converted to other types in Java.

- A. Int
- B. Char
- C. Double
- D. Booleans**

**Page 98**

The keyword that is used to generate exception explicitly in Java is:

- A. Try
- B. Catch
- C. Throw**
- D. Finally

**Google**

Default access (if no other access is specified) for classes and fields in Java is:

- A. Public
- B. Private
- C. Package**
- D. Protected

**Google**

The basic tool for writing programs in PROLOG is:

- A. Recursion**
- B. Inheritance
- C. Polymorphism

**Page 85**

بري صحبت سے تنہائی بہتر ہے اور تنہائی سے نيک صحبت بہتر ہے

**For More Help Contact What's app 03224021365**

## D. Object-Orientation

How many kinds of “type conversion” of primitive types are there in Java?

- A. 2** **Page 175**
- B. 3
- C. 4
- D. 5

Expert system\_\_\_\_\_ provide a structure to design expert system.

- A. Mechanism
- B. Shells**
- C. Lists
- D. Techniques

Which of the following primitive type is available in JAVA?

- A. typedef
- B. struct
- C. byte**
- D. enum

which of given is the magical thing in Prolog?

- A. Program partition
- B. List Processing
- C. Predicate
- D. Inference engine**

The correct way to write comments in a PROLOG program is:

- A. % This is another comment**
- B. /\* This is also a comment \*/
- C. # Consider this a comment
- D. // this is a comment

بري صحبت سے تنہائی بہتر ہے اور تنہائی سے نيک صحبت بہتر ہے

**For More Help Contact What's app 03224021365**

In a PROLOG program, the definitions of predicate sentences or phrases are known as:

- A. Facts
- B. Inferences
- C. Declarations
- D. Clauses**

How many elements are in the following PROLOG list?[[a,list,of,lists], and, numbers,[1,2,3]]

- A. 9
- B. 2
- C. 4**
- D. 6

When you declare a class object in a JAVA program then:

- A. storage is allocated to the object
- B. Object is automatically initialized
- C. Constructor of a class is called**
- D. no storage is allocated to the object

While eliminating repeated elements of list in PROLOG, each element should be replaced with:

- A. Previous element
- B. Next element
- C. Blank space
- D. Single copy of the same element**

The inference mechanism of PROLOG is based upon \_\_\_\_\_.

- A. Forward chaining
- B. Back tracking**
- C. Propositional logic
- D. Recursion

بري صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

**For More Help Contact What's app 03224021365**

In the context of PROLOG language, which problem(s) may mostly occur in backward chaining algorithm?

- A. Complexity
- B. Readiness
- C. Completeness**
- D. Repetition

The facts in a PROLOG program must end with:

- A. Colon (:)
- B. Semicolon (;)
- C. Full stop (.)**
- D. Comma (,)

In the context of Java language, which of following is NOT a correct statement?

- A. Abstract class defines only the structure of the class not its implementation
- B. Abstract class can be initiated by 'new' operator**
- C. Abstract class can be inherited
- D. Every class containing abstract method must be declared abstract

To sort a list in PROLOG language, we need to:

- A. Use the Forward Chaining mechanism
- B. Write the sorting algorithm
- C. Tell the inference engine of PROLOG that what sorting means**
- D. Use Dynamic Programming Techniques

In Prolog, a "member(X, T)" predicate is used to check the membership of X in \_\_\_\_\_.

- A. stack
- B. symbol
- C. class
- D. list**

بري صحبت سے تنہائی بہتر ہے اور تنہائی سے نيک صحبت بہتر ہے

**For More Help Contact What's app 03224021365**

1. In JavaScript, navigator is a \_\_\_\_\_ object

Select the correct option

- a. Browser
- b. User defined
- c. Built-in
- d. Document

2. Which of the following type of numbers are not supported by PHP?

Select the correct option

- a. Real Numbers
- b. Unsinged Integers
- c. Complex Numbers
- d. Singed Integers

3. Which of the following language is used for server-side scripting?

select the correct option

- a. PHP
- b. C#
- c. Ada
- d. C++

4. The model in JavaScript provides access to the contents of the browser window.

بري صحبت سے تنہائی بہتر ہے اور تنہائی سے نيك صحبت بہتر ہے

**For More Help Contact What's app 03224021365**

Select the correct option

a. DOM

b. BOM

c. ROM

d. COM

5. The code written in PHP is returned to the web browser as:

Select the correct option

a. Applets

b. Plain HTML

c. Shell scripts

d. CSS flexbox

6. Which of the given is used before the declaration of variable in PHP?

Select the correct option

a. #sign

b. \$ sign

c. ? sign

d. @sign

7. An in PHP is an ordered map.

Select the correct option

a. string

b. array

c. queue

d. stack

8. In the 'break' statement may have an optional parameter or argument.

بري صحبت سے انتہائی بہتر ہے اور انتہائی سے ليک صحبت بہتر ہے

**For More Help Contact What's app 03224021365**

Select the correct option

- a. C#
- b. C/C++
- c. Java
- d. PHP

9. In PHP 'switch' structure, the starts or implements an implicit loop.

Select the correct option

- a. Break Statement
- b. Continue Statement
- c. For Loop
- d. Return Statement

10. In JavaScript, "with" statement is an alternative of  
select the correct option

- a. Multiple document.write statements
- b. While statement
- c. Single document.write statement
- d. Union statement

11. In how many places a javascript code can be placed?

Select the correct option

- a. 3

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

**For More Help Contact What's app 03224021365**

c. 4

d. 6

12. If an integer variable is not initialized in PHP then its default value will be:

Select the correct option

a. Zero

b. False

c. NULL

d. One

13. In PHP, if a number is beyond the bounds of the integer type, then it will be interpreted as a instead.

Select the correct option

a. string

b. short

c. float

d. long

14. In JavaScript, which of the given provides access to the contents of browser window?

select the correct option

a. BOM

b. ROM

c. DOM

d. COM

15. The scripts written in PHP are executed by:

Select the correct option

بري صحبت سے تنہائی بہتر ہے اور تنہائی سے ٹیگ صحبت بہتر ہے

**For More Help Contact What's app 03224021365**

- a. Web browser
- b. Java
- c. Applet Client machine
- d. Web Server

16. Arrays in JavaScript are based.

Select the correct option

- a. Length
- b. One
- b. Index Location
- d. Zero Index

17. Classes and objects of PHP are similar to

Select the correct option

- a. Classes and objects of Basic
- b. Classes and objects of C
- c. Classes and objects of Java
- d. Classes and objects of C++

18. Which of the following type of numbers are not supported by PHP?

select the correct option

- a. Complex Numbers
- b. Unsinged Integers
- c. Real Numbers
- d. Singed Integers

19. To dynamically generate a web page, which of the following programming language is most suitable?

برای صحبت سے تہائی بہتر ہے اور تہائی سے الگ صحبت بہتر ہے

**For More Help Contact What's app 03224021365**

the correct option

a. PHP

b. C++

c. Ada

d. Prolog

20. The scripts written in PHP are executed by:

Select the correct option

a. Web Server

b. Web browser

c. Client machine

d. Java Applet

21. Which of the given is used before the declaration of variable in PHP?

Select the correct option

a. ? sign

b. @sign

c. #sign

d. \$ sign

22. The data type of variable in PHP is automatically determined by its:

select the correct option

a. Name

b. Location

c. Size

d. Value

23. an object that describes the basic characteristics of the browser, notably its type and version. Select the correct option

برای صحبت سے تہائی بہتر ہے اور تہائی سے نیگ صحبت بہتر ہے

**For More Help Contact What's app 03224021365**

- a. Window
- b. Navigator
- c. Document
- d. Location

24. How many <script> tags can be used in the <head> element?

Select the correct option

- a. One
- b. Many
- c. Zero
- d. Two

25. Which of the following language is used for server-side scripting?

Select the correct option

- a. C#
- b. Ada
- c. C++
- d. PHP

26. An in PHP is an ordered map.

Select the correct option

- a. queue
- b. array
- c. stack
- d. string

27. In Strings and numeric values are inter convertible

Select the correct option

a. C#

b. C/C++

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

**For More Help Contact What's app 03224021365**

c. PHP

d. Java

28. In JavaScript, "with" statement is an alternative of

Select the correct option

a. While statement

b. Union statement

c. Multiple document.write statements

d. Single document.write statement

29. In PHP switch structure, the starts or implements an implicit loop.

Select the correct option

a. Return Statement

b. Break Statement

c. Continue Statement

d. For Loop

بري صحبت سے تنہائی بہتر ہے اور تنہائی سے نيك صحبت بہتر ہے

For More Help Contact What's app 03224021365

Question # 6 of 10 ( Start time: 10:39:13 AM, 19 July 2023 )

Total Marks:

PHP stands for \_\_\_\_\_ .

Select the correct option

|                                  |                             |
|----------------------------------|-----------------------------|
| <input type="radio"/>            | PHP: Home Preprocessor      |
| <input checked="" type="radio"/> | PHP: Hypertext Preprocessor |
| <input type="radio"/>            | PHP: Hypertext Page         |
| <input type="radio"/>            | PHP: Home Page              |

Question # 7 of 10 ( **Start time: 10:39:36 AM, 19 July 2023** )

Total Marks: 1

In JavaScript, navigator is a \_\_\_\_\_ object.

Select the correct option

|                                  |              |
|----------------------------------|--------------|
| <input type="radio"/>            | User defined |
| <input checked="" type="radio"/> | Browser      |
| <input type="radio"/>            | Document     |
| <input type="radio"/>            | Built-in     |

Question # 10 of 10 ( Start time: 10:40:55 AM, 19 July 2023 )

Total Marks: 1

To dynamically generate a web page, which of the following programming language is most suitable?

Select the correct option



Reload Math Equations

|                                  |        |
|----------------------------------|--------|
| <input type="radio"/>            | Ada    |
| <input type="radio"/>            | C++    |
| <input type="radio"/>            | Prolog |
| <input checked="" type="radio"/> | PHP    |

Question # 9 of 10 ( Start time: 10:40:33 AM, 19 July 2023 )

Total Marks: 1

In \_\_\_\_\_, Strings and numeric values are inter convertible

Select the correct option

|                                  |       |
|----------------------------------|-------|
| <input type="radio"/>            | C/C++ |
| <input type="radio"/>            | Java  |
| <input type="radio"/>            | PHP   |
| <input checked="" type="radio"/> | C#    |

Question # 5 of 10 ( Start time: 10:12:13 AM, 19 July 2023 )

Total Marks: 1

To dynamically generate a web page, which of the following programming language is most suitable?

Select the correct option

[Reload Math Equations](#)

|                       |        |
|-----------------------|--------|
| <input type="radio"/> | Prolog |
| <input type="radio"/> | PHP    |
| <input type="radio"/> | C++    |
| <input type="radio"/> | Ada    |

## Question # 1 of 10 ( Start time: 10:10:14 AM, 19 July 2023 )

Total Marks:

In JavaScript, navigator is a \_\_\_\_\_ object.

Select the correct option

|                                  |              |
|----------------------------------|--------------|
| <input type="radio"/>            | User defined |
| <input checked="" type="radio"/> | Browser      |
| <input type="radio"/>            | Document     |
| <input type="radio"/>            | Built-in     |

Question # 2 of 10 ( Start time: 10:11:00 AM, 19 July 2023 )

Total Marks: 1

The division of two integers (i.e.  $7/2$ ) in PHP generates a/an:

Select the correct option



Reload Math Equations



Floating point number



Integer



Exception



Runtime error

Question # 4 of 10 ( Start time: 10:11:56 AM, 19 July 2023 )

Total Marks:

Arrays in JavaScript are \_\_\_\_\_ based.

Select the correct option

|                                  |            |
|----------------------------------|------------|
| <input type="radio"/>            | One Index  |
| <input type="radio"/>            | Length     |
| <input checked="" type="radio"/> | Zero Index |
| <input type="radio"/>            | Location   |

## Question # 3 of 10 ( Start time: 10:11:28 AM, 19 July 2023 )

Total Marks:

Which of the given is used before the declaration of variable in PHP?

Select the correct option

|                                  |         |
|----------------------------------|---------|
| <input type="radio"/>            | @ sign  |
| <input type="radio"/>            | # sign  |
| <input checked="" type="radio"/> | \$ sign |
| <input type="radio"/>            | ? sign  |

Question # 6 of 10 ( Start time: 10:12:43 AM, 19 July 2023 )

Total Marks

In \_\_\_\_\_, the 'break' statement may have an optional parameter or argument.

Select the correct option

|                                  |       |
|----------------------------------|-------|
| <input type="radio"/>            | Java  |
| <input type="radio"/>            | C#    |
| <input type="radio"/>            | C/C++ |
| <input checked="" type="radio"/> | PHP   |

Question # 8 of 10 ( Start time: 10:13:31 AM, 19 July 2023 )

Total Marks:

In PHP 'switch' structure, the \_\_\_\_\_ starts or implements an implicit loop.

Select the correct option

|                                  |                    |
|----------------------------------|--------------------|
| <input checked="" type="radio"/> | Continue Statement |
| <input type="radio"/>            | Break Statement    |
| <input type="radio"/>            | Return Statement   |
| <input type="radio"/>            | For Loop           |

Question # 7 of 10 ( Start time: 10:13:08 AM, 19 July 2023 )

Total Marks: 1

Which operator is used for concatenation in JavaScript?

Select the correct option

|                                  |        |
|----------------------------------|--------|
| <input checked="" type="radio"/> | +      |
| <input type="radio"/>            |        |
| <input type="radio"/>            | \$     |
| <input type="radio"/>            | dot(.) |

Question # 3 of 10 ( Start time: 10:17:48 AM, 19 July 2023 )

Total Marks: 1

The resultant value of variable 'x' in JavaScript statement `var x = "5" - "2" ;` will be\_\_\_\_\_.

Select the correct option

|                                  |        |
|----------------------------------|--------|
| <input type="radio"/>            | 52     |
| <input type="radio"/>            | "5"-2" |
| <input checked="" type="radio"/> | 3      |
| <input type="radio"/>            | 5-2    |

Question # 10 of 10 ( Start time: 10:14:18 AM, 19 July 2023 )

Total Marks: 1

The resultant value of variable 'x' in JavaScript statement `var x = "5" - "2" ;` will be \_\_\_\_\_.

Select the correct option

|                                  |        |
|----------------------------------|--------|
| <input type="radio"/>            | 5-2    |
| <input checked="" type="radio"/> | 3      |
| <input type="radio"/>            | 52     |
| <input type="radio"/>            | "5"-2" |

Question # 2 of 10 ( Start time: 10:17:21 AM, 19 July 2023 )

Total Marks: 1

In JavaScript, which of the given provides access to the contents of browser window?

Select the correct option

|                                  |     |
|----------------------------------|-----|
| <input type="radio"/>            | COM |
| <input type="radio"/>            | ROM |
| <input type="radio"/>            | BOM |
| <input checked="" type="radio"/> | DOM |

## Question # 1 of 10 ( Start time: 10:16:56 AM, 19 July 2023 )

Total Marks:

How many <script> tags can be used in the <head> element?

Select the correct option

|                                  |      |
|----------------------------------|------|
| <input type="radio"/>            | Two  |
| <input type="radio"/>            | Zero |
| <input type="radio"/>            | One  |
| <input checked="" type="radio"/> | Many |

Question # 9 of 10 ( Start time: 10:13:55 AM, 19 July 2023 )

Total Marks: 1

The code written in PHP is returned to the web browser as:

Select the correct option

[Reload Math Equations](#)

|                                  |               |
|----------------------------------|---------------|
| <input checked="" type="radio"/> | Plain HTML    |
| <input type="radio"/>            | Shell scripts |
| <input type="radio"/>            | Applets       |
| <input type="radio"/>            | CSS flexbox   |

Question # 7 of 10 ( Start time: 10:19:22 AM, 19 July 2023 )

Total Marks

PHP stands for \_\_\_\_\_ .

Select the correct option

|                                  |                             |
|----------------------------------|-----------------------------|
| <input checked="" type="radio"/> | PHP: Hypertext Preprocessor |
| <input type="radio"/>            | PHP: Home Preprocessor      |
| <input type="radio"/>            | PHP: Hypertext Page         |
| <input type="radio"/>            | PHP: Home Page              |

Question # 8 of 10 ( Start time: 10:20:00 AM, 19 July 2023 )

Total Marks:

The scripts written in PHP are executed by:

Select the correct option



Reload Math Equations

|                                  |                |
|----------------------------------|----------------|
| <input checked="" type="radio"/> | Web Server     |
| <input type="radio"/>            | Java Applet    |
| <input type="radio"/>            | Client machine |
| <input type="radio"/>            | Web browser    |

Question # 6 of 10 ( Start time: 10:19:05 AM, 19 July 2023 )

Total Marks: 1

Which of the following language is used for server-side scripting?

Select the correct option



Reload Math Equations



Ada



C#



C++



PHP

Question # 4 of 10 ( Start time: 10:18:14 AM, 19 July 2023 )

Total Marks:

Which of the given operator is used to return a reference from a function in PHP?

Select the correct option

|                                  |     |
|----------------------------------|-----|
| <input checked="" type="radio"/> | &   |
| <input type="radio"/>            | &&  |
| <input type="radio"/>            | Dot |
| <input type="radio"/>            | \$  |

## Question # 9 of 10 ( Start time: 10:20:26 AM, 19 July 2023 )

Total Marks:

Which of the given is used before the declaration of variable in PHP?

Select the correct option

|                                  |         |
|----------------------------------|---------|
| <input type="radio"/>            | @ sign  |
| <input type="radio"/>            | # sign  |
| <input type="radio"/>            | ? sign  |
| <input checked="" type="radio"/> | \$ sign |

Question # 10 of 10 ( Start time: 10:20:54 AM, 19 July 2023 )

Total Marks:

To dynamically generate a web page, which of the following programming language is most suitable?

Select the correct option



Reload Math Equations

|                                  |        |
|----------------------------------|--------|
| <input checked="" type="radio"/> | PHP    |
| <input type="radio"/>            | Prolog |
| <input type="radio"/>            | C++    |
| <input type="radio"/>            | Ada    |

Question # 3 of 10 ( Start time: 10:37:40 AM, 19 July 2023 )

Total Marks:

"with" statement in JavaScript is an alternative of \_\_\_\_\_.

Select the correct option

|                                  |                                      |
|----------------------------------|--------------------------------------|
| <input type="radio"/>            | Multiple 'document.read' Statements  |
| <input type="radio"/>            | Single 'document.read' Statement     |
| <input checked="" type="radio"/> | Multiple 'document.write' Statements |
| <input type="radio"/>            | Single 'document.write' Statement    |

## Question # 4 of 10 ( Start time: 10:38:10 AM, 19 July 2023 )

Total Marks:

Which of the given is used before the declaration of variable in PHP?

Select the correct option

|                                  |         |
|----------------------------------|---------|
| <input type="radio"/>            | ? sign  |
| <input type="radio"/>            | # sign  |
| <input checked="" type="radio"/> | \$ sign |
| <input type="radio"/>            | @ sign  |

Question # 5 of 10 ( Start time: 10:18:37 AM, 19 July 2023 )

Total Marks:

The \_\_\_\_\_ model in JavaScript provides access to the contents of the browser window.

Select the correct option

|                                  |     |
|----------------------------------|-----|
| <input type="radio"/>            | BOM |
| <input type="radio"/>            | ROM |
| <input checked="" type="radio"/> | DOM |
| <input type="radio"/>            | COM |

Question # 1 of 10 ( Start time: 10:36:35 AM, 19 July 2023 )

Total Marks: 1

\_\_\_\_\_, an object that describes the basic characteristics of the browser, notably its type and version.

Select the correct option

|                                  |           |
|----------------------------------|-----------|
| <input type="radio"/>            | Document  |
| <input type="radio"/>            | Location  |
| <input checked="" type="radio"/> | Navigator |
| <input type="radio"/>            | Window    |

Question # 2 of 10 ( Start time: 10:36:57 AM, 19 July 2023 )

Total Marks

In JavaScript, "with" statement is an alternative of \_\_\_\_\_.

Select the correct option

|                                  |                                    |
|----------------------------------|------------------------------------|
| <input type="radio"/>            | While statement                    |
| <input checked="" type="radio"/> | Multiple document.write statements |
| <input type="radio"/>            | Single document.write statement    |
| <input type="radio"/>            | Union statement                    |

Question # 5 of 10 ( Start time: 10:38:46 AM, 19 July 2023 )

Total Marks:

The \_\_\_\_\_ model in JavaScript provides access to the contents of the browser window.

Select the correct option

|                                  |     |
|----------------------------------|-----|
| <input checked="" type="radio"/> | DOM |
| <input type="radio"/>            | ROM |
| <input type="radio"/>            | COM |
| <input type="radio"/>            | BOM |

Question # 8 of 10 ( Start time: 10:39:50 AM, 19 July 2023 )

Total Marks: 1

The data type of variable in PHP is automatically determined by its:

Select the correct option



Reload Math Equations

|                                  |          |
|----------------------------------|----------|
| <input type="radio"/>            | Size     |
| <input checked="" type="radio"/> | Value    |
| <input type="radio"/>            | Location |
| <input type="radio"/>            | Name     |

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365